

Bicycle Facility Types

SHARED BICYCLE LANE



SEATTLE, WA



APPLETON, WI



CHICAGO, IL



CLAYTON, NY

- Typically used on streets with moderately low traffic volumes
- Vehicles per Day: 1,500 to 3,000 Speed: 20 to 25 mph
- Bicycles share the street with vehicles but have a designated bike lane
- Typically used where widths are not sufficient for standard bicycle lanes


- Used along rural highways or thoroughfares to provide a separate space for bicyclists
- Vehicles per Day: 3,000 Speed: Greater than 45 mph
- Shoulders can be differentiated with contrasting pavement materials and/or surface coloring, wide solid white edge line markings or buffered white edge lines
- Painted buffer increases lateral separation between bicyclists and hazards such as passing motor vehicles and car doors



BALTIMORE, MA



MODESTO, CA

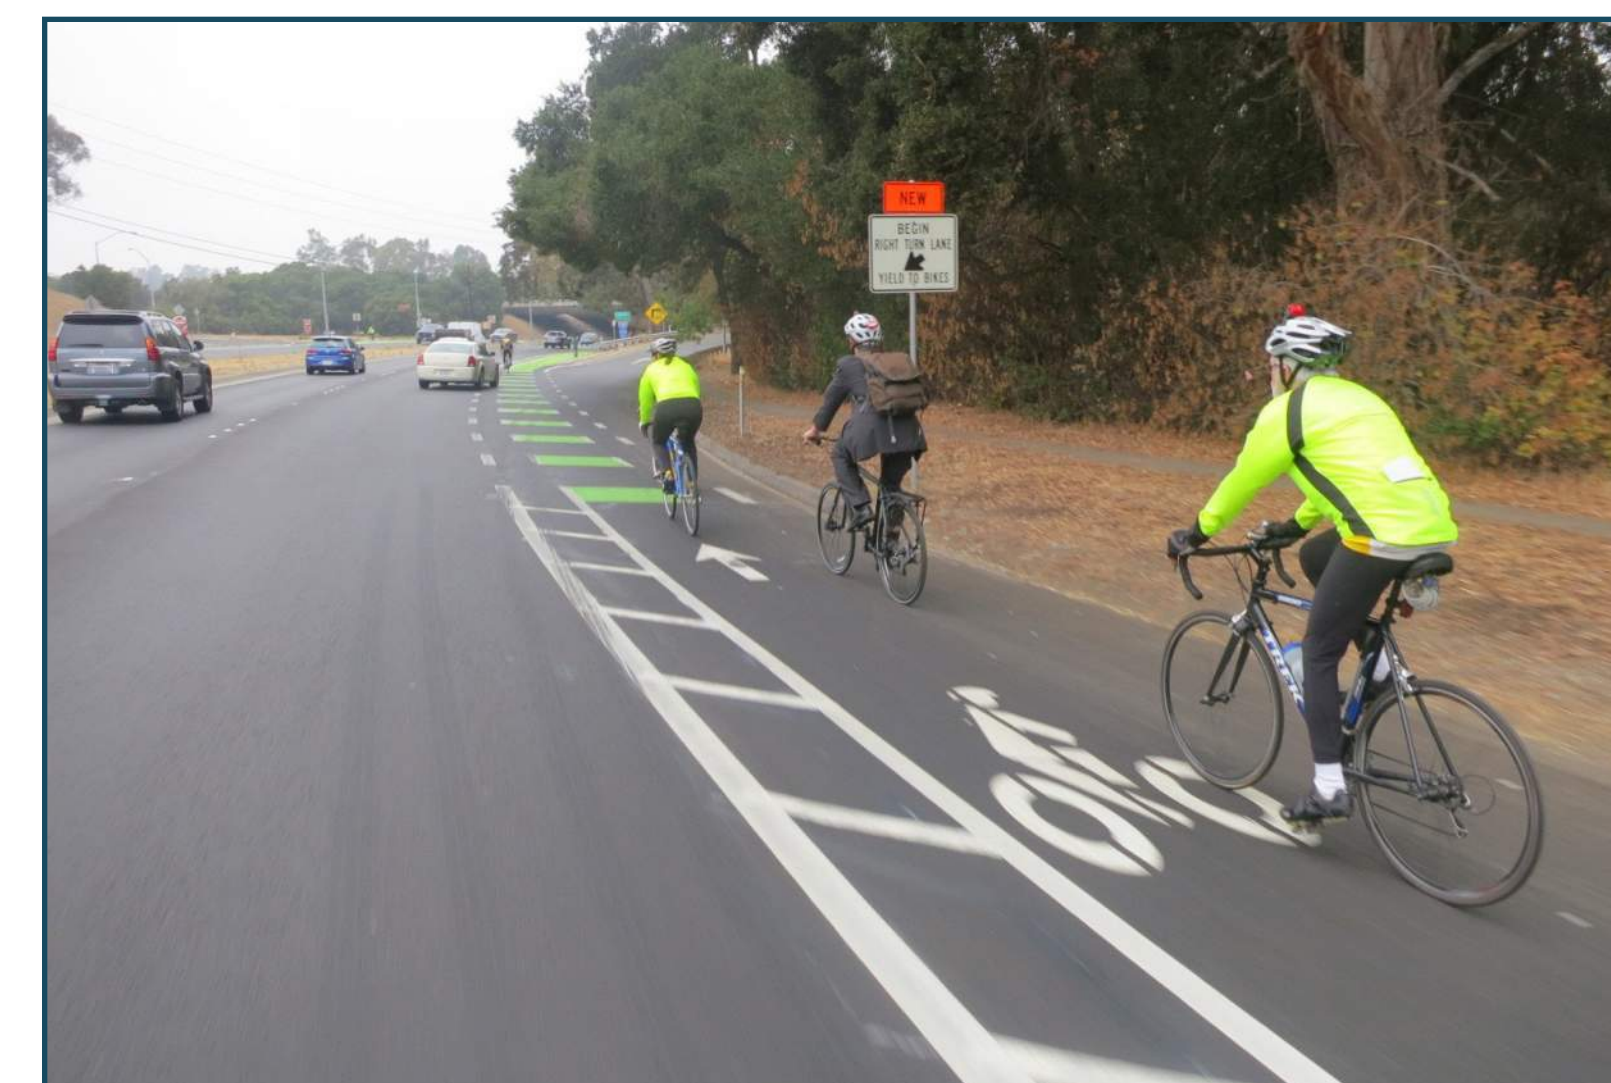

MENLO PARK, CA



SUNNYVALE, CA